


CAMERA

LP-A722

2MP HD ANPR Bullet Network Camera



- Starlight
- 2MP (1920 × 1080) @30fps
- Support smart H.265/H.264 coding
- ICR auto switch, true day/night
- Up to 100m IR night view distance; motorized zoom lens
- 3D DNR, true WDR, HLC, BLC and ROI coding
- Built-in micro SD card slot, up to 256GB
- 1CH audio input; 1CH audio output
- 1CH alarm input; 1CH alarm output
- DC12V/PoE power supply
- Support three streams
- IP67
- Support mobile surveillance by smart phones with iOS and Android OS
- Intelligent analytics: video abnormality (video blur detection, video color cast detection, scene change), license plate recognition

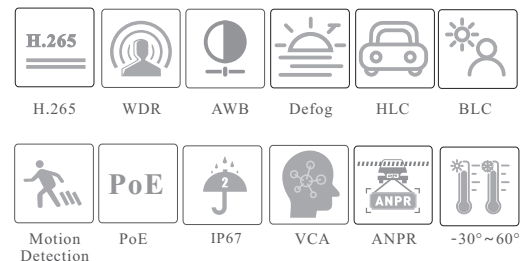

This document is intended for the exclusive viewing of the intended recipient. Disclosure, copying, distribution, or use of the content is strictly prohibited. These materials are for illustration purposes only and the actual product may vary in size and/or color. All specifications are subject to change without notice.

for more information visit www.shieldcctv.com


©Shield Technology Inc.

SPECIFICATIONS

Model	LP-A722	
Specifications		
Camera		
Image Sensor	1 / 2.8" CMOS	
Image Size	1920 × 1080	
Electronic Shutter	1 / 3 s ~ 1 / 10000 s	
Iris Type	DC Iris	
Min. Illumination	0.0026 lux@F1.2,AGC ON; 0 lux with IR 0.005 lux@F1.6, AGC ON; 0 lux with iR	
Lens	2.8~12mm@F1.4, motorized	7~22mm@F1.6, motorized
Field of View	H: 103.4°~32.4°; V:71°~181.5°; D: 111°~36.8°	H: 44°~17.6°; V:25.6°~10°; D: 49.7°~20.2°
Lens Mount	Φ14	
Wide Dynamic Range	120dB	
BLC	Yes	
HLC	Yes	
Defog	Yes	
Digital NR	3D DNR	
Angle Adjustment	Pan: 0°~360°; Tilt:0°~90°; Rotation: 0°~360°	
Image		
Video Compression	Main stream: Smart H.265 / H.265+ / H.265 / Smart H.264 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG	
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile	
Resolution	1080P (1920 × 1080) , 720P (1280 × 720) , D1, CIF, 480 × 240	
Main Stream	60Hz : 1080P / 720P(1 ~ 30fps); 50Hz : 1080P / 720P(1 ~ 25fps) HFR Mode: 1080P/720P (60Hz: 1~60fps; 50Hz: 1~50fps)	
Sub Stream	60Hz : 720P/D1/CIF/480x240 (1~30fps); 50HZ: 720P/D1/CIF/480x240 (1~25fps)	
Third Stream	60Hz : D1/CIF/480x240 (1~30fps); 50Hz: D1/CIF/480x240 (1~25fps)	
Bit Rate	64 Kbps ~ 6 Mbps	
Bit Rate Type	VBR / CBR	
Audio Compression	G711A / U	
Image Settings	ROI, Saturation, Brightness, Hue, Contrast,Wide Dynamic, Sharpness, NR,etc. adjustable through client software or web browser	
ROI	Each ROI to be configured separately	
Interfaces		
Network	RJ 45	
Video Output	No	
Audio	1CH audio input; 1CH audio output	
Storage	Built-in micro SD card slot; up to 256GB	
Reset	Yes	
Alarm	1CH alarm input; 1CH alarm output	
RS 485	No	
Functions		
Remote Monitoring	Web browsing,CMS remote control	
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission	
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTMP, RTP, RTCP, ICMP, IGMP, PPPoE, DDNS, SMTP, FTP, SNMP,HTTP, HTTP POST, 802.1x, UPnP, HTTPs, QoS	
Interface Protocol	ONVIF	
Storage	Network remote storage; micro SD card storage	
Smart Alarm	Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection	
Intelligent Analytics	Video blur detection, video color cast detection, scene change detection, license plate recognition	
General Function	Watermark, IP address filtering, video mask, heartbeat, password protection	
PoE	Yes , IEEE802.3af	
IR Distance	50~70m	70~100m
Protection Grade	IP67	

LPR	
Snapshot	Overview and cutout of plate for picture
Vehicle Plate Database	10,000
Capture Speed Range	0~70km/h
Others	
Power Supply	DC12V/PoE
Power Consumption	< 11 W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F) Humidity: less than 95 % (non-condensing)
Dimensions (mm)	279.5 × 100.3 × 88.9
Weight (net)	Approx. 1.04KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)

DIMENSIONS

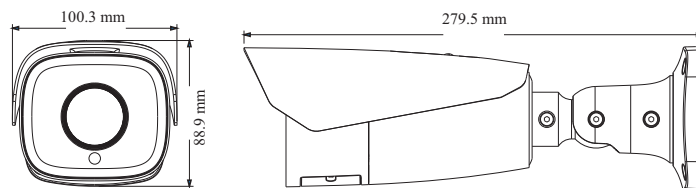

AVAILABLE ACCESSORIES



AVAILABLE MODEL

Available Model	LP-A722	7~22mm, motorized
-----------------	---------	-------------------