



































4K Output HD IPC

DDNS

Network

Audio

MIC

Mobile

CMS

USB

Mouse

E-mail

AI-NVR16-16P 4K series are 16 CH 8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P high definition PoE NVRs, which adopt the most advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system.

AI-NVR16-16P 4K series integrate with 8 PoE network ports and support 8 CH IPC direct connection to NVR, simultaneous 16 CH playback, and 4K high definition display. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.









For more information, please visit our website

AI-NVR16-16P 4K

SPECIFICATIONS


Model	AI-NVR16-16P 4K
Compression	Standard H.265/H.264
System OS	Embedded Linux
Network Input	16CH IPC input
Network Bandwidth	160Mbps/160Mbps (access/transfer)
Video Network Access Format	8MP/5MP/4MP/3MP/1080P/960P/720P@25/30fps
Output	HDMI × 1 : 3840 × 2160 / 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768
Network Input	16 CH IPC audio input
Audio 2-way Audio	RCA×1
Local Output	RCA×1
Record Stream	Dual stream recording
Record Resolution	8MP/5MP/4MP/3MP/1080P/960P/720P
Mode	Manual, timer, motion, sensor
Simultaneous Playback	Max 16 CH
ayback Search	Time slice / time / event / tag search
Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
Function	Play, pause, FF, FB, digital zoom, etc.
Mode	Manual, sensor, motion, exception
Input	8 CH local alarm input, support 8CH IPC alarm input
Output	4 CH
Triggering	Record, snap, preset, e-mail, etc.
Channel	16 CH
Face Picture Database	16 libraries 10000 Face Pictures
Computing Capability	240 pictures / minute
Face Picture Search	Search by picture is supported
Database Management	Add, modify, delete and search face pictures
Face Picture Adding	Add face pictures through APP, WEB and local PC
External face	Resolution: 64 x 64 ~ 1920 x 1080
Face picture enrollment	Size: less than 200KB Format: jpg
Face Picture Comparison	Support allow list and block list alarm
Face Trace	Yes
Map of Face Trace	Reolution: 600 x 300 ~ 3840 x 2160 Size: within 200KB Format: jpg
Statistic Graph of Face Information	Bar graph, pie chart
Statistic Mode of Face Information	Statistics by day, week, month, quarter as well as customized time period
Interface	RJ 45 1000 Mbps × 1
PoE Port	RJ 45 × 16
etwork Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
Web Client	Multiple users online
Mobile OS	iOS, Andriod
torage HDD	SATA × 2, max 10T per HDD
etwork PoE Poi Protocc Web Clie Mobile Device OS	rt ol

Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
Port	RS 485	RS485 × 2, connect to PTZ or keyboard
	USB	USB 2.0 \times 1 , USB 3.0 \times 1 (one in the front panel and the other in the rear panel)
	Remote Controller	Optional
Others	Power Supply	DC48V/2.5A
	Consumption	≤ 15W (without HDD)
	Dimensions (mm)	380 × 268 × 52 (W × D × H)
	Work Environment	-10 ~ 50 °C , 10% ~ 90% humidity

Features

- Support 16 CH 8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P IP input
- Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
- Playback: 16 CH simultaneous playback
- Search: time slice, time, event (manual, sensor, motion), tag search
- Support face detection and comparison
- Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol and CMS supported
- Remote control via IE or CMS: preview, playback, backup, PTZ and configuration
- 8 PoE network ports, support IPC direct connection to NVR; support PoE power supply
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phone and PAD
- Powerful smart phone & Pad surveillance with iOS and Andriod OS

DIMENSIONS

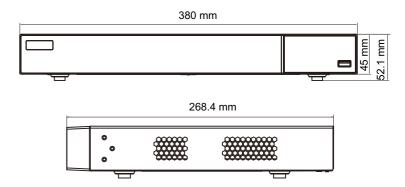

AI-NVR16-16P 4K 8MP/5MP/4MP/3MP/1080P/960P/720P HD PoE NVR

Rear Panel

